



**WS05M2T**
**Transient Voltage Suppressor**

## Features

- 345 watts peak pulse power ( $t_p = 8/20\mu s$ )
- Protects one bidirectional line or two unidirectional lines
- Working Voltages: 5V
- Low clamping voltages

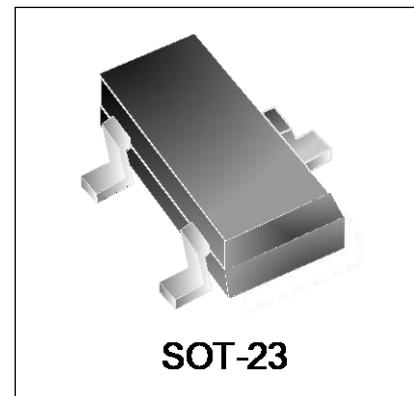

## IEC COMPATIBILITY (EN61000-4)

- IEC 61000-4-2 (ESD)  $\pm 30kV$  (air),  $\pm 30kV$  (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 23A (8/20 $\mu s$ )


## Mechanical Characteristics

- JEDEC SOT-23 package
- Marking: Marking Code
- Packaging: Tape and Reel per EIA 481
- RoHS Compliant


## Applications

- RS-232, RS-422 & RS-485
- Cellular Handsets and Accessories
- Control & Monitoring Systems
- Portable Electronics
- Set-Top Box
- Servers, Notebook, and Desktop PC
- Wireless Bus Protection

## Circuit Diagram

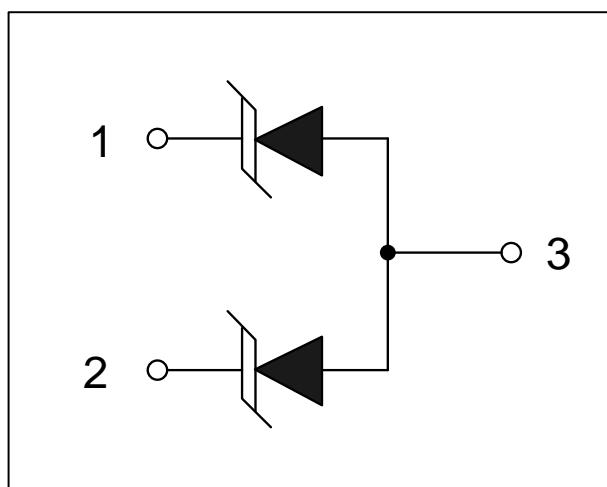


## Schematic & PIN Configuration

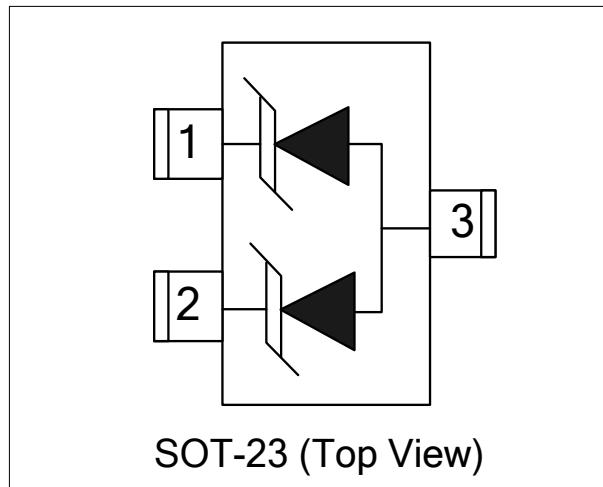

<b>Absolute Maximum Rating</b>			
<b>Rating</b>	<b>Symbol</b>	<b>Value</b>	<b>Units</b>
Peak Pulse Power ( $t_p=8/20\mu s$ )	$P_{PP}$	345	W
Peak Pulse Current ( $t_p=8/20\mu s$ )	$I_{PP}$	23	A
Operating Temperature	$T_J$	-55 to +125	°C
Storage Temperature	$T_{STG}$	-55 to +150	°C

## Electrical Parameters ( $T=25^\circ C$ )

<b>Symbol</b>	<b>Parameter</b>
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$V_{RWM}$	Working Peak Reverse Voltage
$I_R$	Maximum Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_F$	Forward Current
$V_F$	Forward Voltage @ $I_F$

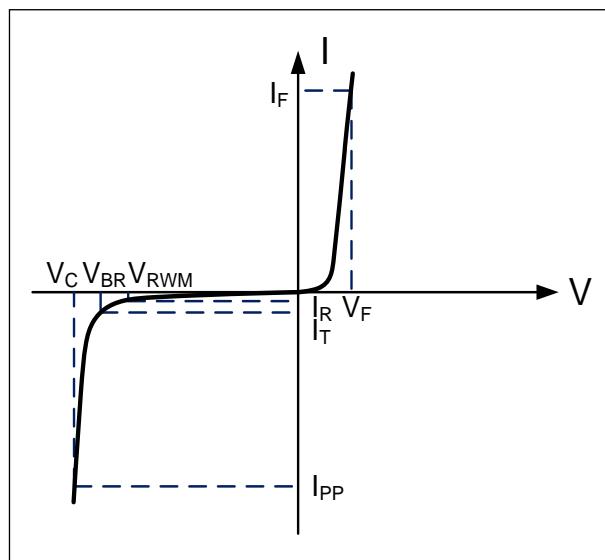

## Electrical Characteristics


<b>WS05M2T</b>						
<b>Parameter</b>	<b>Symbol</b>	<b>Conditions</b>	<b>Minimum</b>	<b>Typical</b>	<b>Maximum</b>	<b>Units</b>
Reverse Stand-Off Voltage	$V_{RWM}$				5	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T=1mA$	6			V
Reverse Leakage Current	$I_R$	$V_{RWM}=5V, T=25^\circ C$			500	nA
Forward Voltage	$V_F$	$I_F=10mA$	0.5		1.2	V
Clamping Voltage	$V_C$	$I_{PP}=1A, t_p=8/20\mu s$			9.8	V
Maximum Clamping Voltage	$V_C$	$I_{PP}=23A, t_p=8/20\mu s$		11	15	V
Dynamic Resistance <sup>1,2</sup>	$R_{DYN}$	$TLP=0.2/100ns$		0.13		Ω
ESD Clamping Voltage <sup>1</sup>	$V_C$	$I_{PP} = 4A, t_p = 0.2/100ns (TLP)$		7.9		V
ESD Clamping Voltage <sup>1</sup>	$V_C$	$I_{PP} = 16A, t_p = 0.2/100ns (TLP)$		9.4		V
Junction Capacitance	$C_j$	$Pin 1 to 2, V_R = 0V, f = 1MHz$		86		pF
Junction Capacitance	$C_j$	$Pin 1 to 3 and Pin 2 to 3, V_R = 0V, f = 1MHz$		170		pF

Notes : 1. TLP Setting :  $t_p=100ns$ ,  $t_f=0.2ns$ ,  $I_{TLP}$  and  $V_{TLP}$  sample window: $t_1=70ns$  to  $t_2=90ns$ .


2. Dynamic resistance calculated from  $I_{PP}=4A$  to  $I_{PP}=16A$  using "Best Fit".

## Typical Characteristics


**Figure 1: Peak Pulse Power vs. Pulse Time**

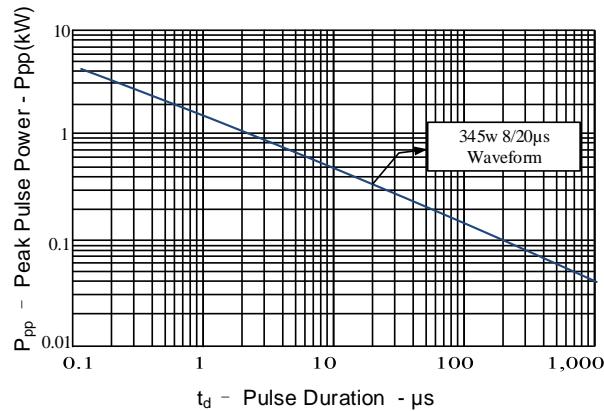


**Figure 2: Power Derating Curve**

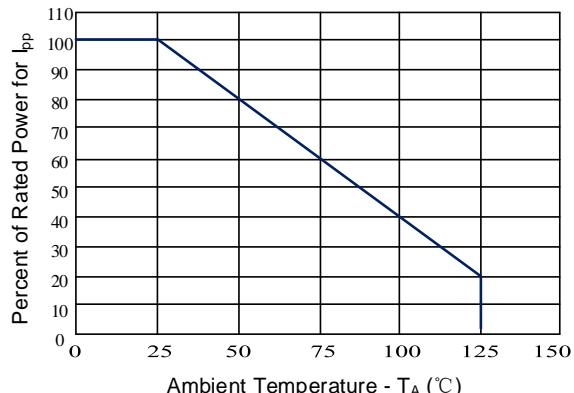


**Figure 3: Clamping Voltage vs. Peak Pulse Current**

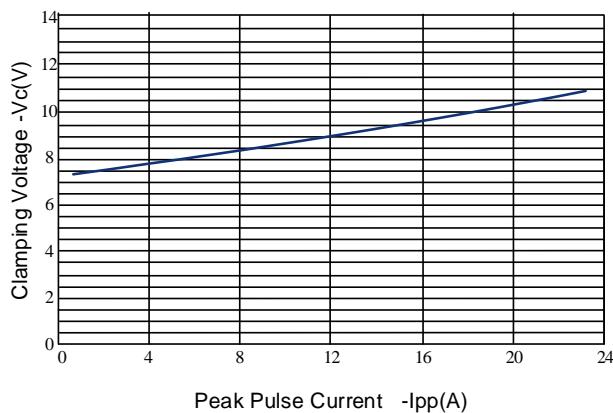


**Figure 4: Normalized Junction Capacitance vs. Reverse Voltage (PIN1-PIN3)**

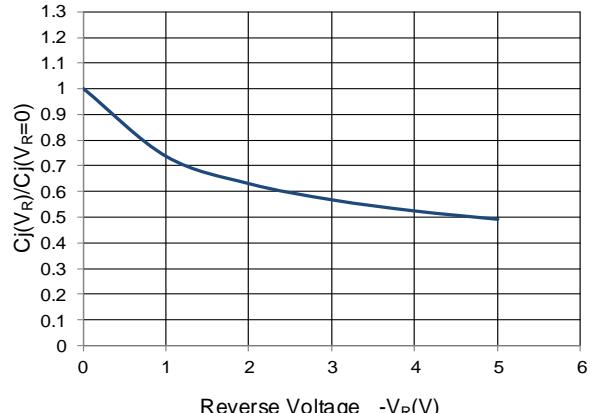

**Figure 5: 8/20 $\mu$ s Pulse Waveform**

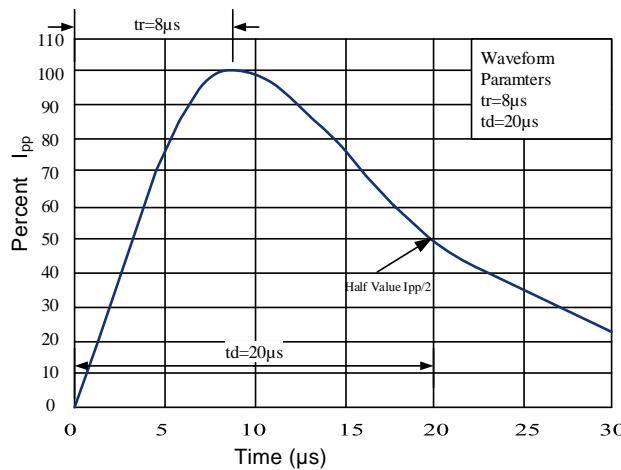


**Figure 6: TLP I-V Curve**

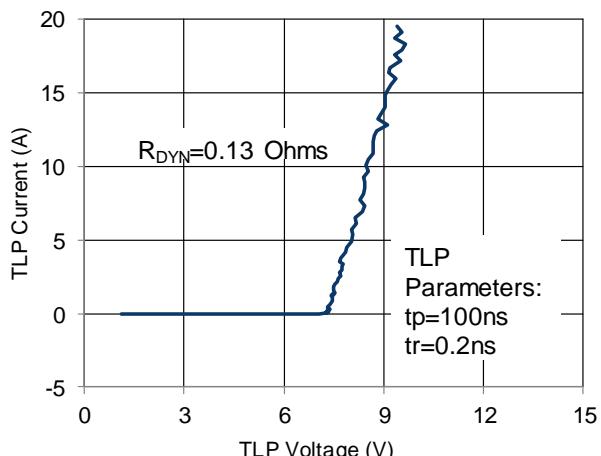

## Soldering Parameters


Reflow Condition		Pb – Free assembly
Pre Heat	Temperature Min ( $T_{s(min)}$ )	150°C
	Temperature Max ( $T_{s(max)}$ )	200°C
	Time (min to max) ( $t_s$ )	60 – 190 secs
Average ramp up rate (Liquidus Temp) ( $T_L$ ) to peak		5°C/second max
$T_{s(max)}$ to $T_L$ —Ramp-up Rate		5°C/second max
Reflow	Temperature ( $T_L$ ) (Liquidus)	217°C
	Temperature ( $t_L$ )	60 – 150 seconds
	Peak Temperature ( $T_P$ )	260+0/-5 °C
Time within actual peak Temperature ( $t_p$ )		20 – 40 seconds
Ramp-down Rate		5°C/second max
Time 25°C to peak Temperature ( $T_P$ )		8 minutes Max.
Do not exceed		280°C

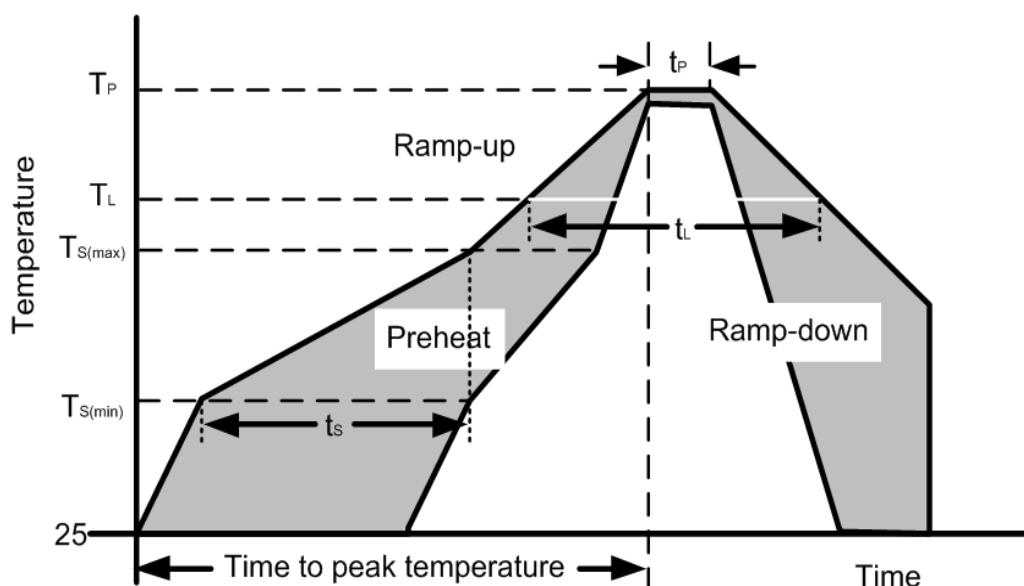

## Outline Drawing – SOT-23

PACKAGE OUTLINE		DIMENSIONS			
SYMBOL	MILLIMETERS		INCHES		
	MIN	MAX	MIN	MAX	
A	0.90	1.15	0.035	0.045	
A1	0.00	0.10	0.000	0.004	
A2	0.60	0.70	0.024	0.028	
b	0.30	0.50	0.012	0.020	
c	0.08	0.15	0.003	0.006	
D	2.80	3.00	0.110	0.118	
E	2.25	2.55	0.089	0.100	
E1	1.20	1.40	0.047	0.055	
e	0.95 BSC		0.037 BSC		
e1	1.80	2.00	0.071	0.079	
L	0.30	0.50	0.012	0.020	
$\theta$	0	8°	0	8°	

**Notes:**  
Controlling Dimension: Millimeter.

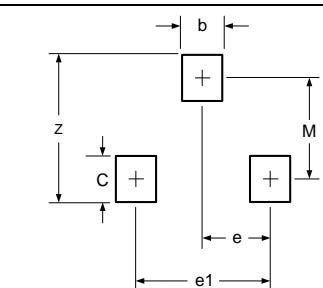

DIMENSIONS		
DIM	INCHES	MILLIMETER S
M	0.0795	2.02
C	0.0315	0.80
Z	0.111	2.82
e	0.037 BSC	0.95 BSC
e1	0.075 BSC	1.9 BSC
b	0.0315	0.80

## Marking Codes

Part Number	WS05M2T
Marking Code	

## Package Information

Qty: 3k/Reel

## CONTACT INFORMATION

No.1001, Shiwan (7) Road, Pudong District, Shanghai, P.R.China.201207

Tel: 86-21-68969993 Fax: 86-21-50757680 Email: [market@way-on.com](mailto:market@way-on.com)WAYON website: <http://www.way-on.com>

For additional information, please contact your local Sales Representative.

**WAYON** ® is registered trademark of Wayon Corporation.

Specifications are subject to change without notice.  
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
Users should verify actual device performance in their specific applications.